

TETHERING A FLOAT & HOUSE (To keep it in mid water)

SET THE TETHER POSTS ON OPPOSITE BANKS.


ROPE (1) LENGTH NEEDS TO BE THE SHORTEST DISTANCE FROM THE DESIRED POSITION OF THE FLOAT BACK TO THE BANK.

ROPE (2) LENGTH NEEDS TO BE THE DISTANCE FROM THE FLOAT TO THE OPPOSITE BANK, PLUS THE LENGTH OF ROPE (1)

SCREW THE ROPE EYES INTO OPPOSITE POSITIONS ON THE FLOAT AND TIE ON THE TWO TETHER ROPES

AT POST (A) TIE OFF THE END OFF ROPE (1)


AT POST (B) TIE OFF THE END OFF THE ROPE (2) THEN TAKE UP THE SLACK ROPE AND TIE OFF AGAIN.

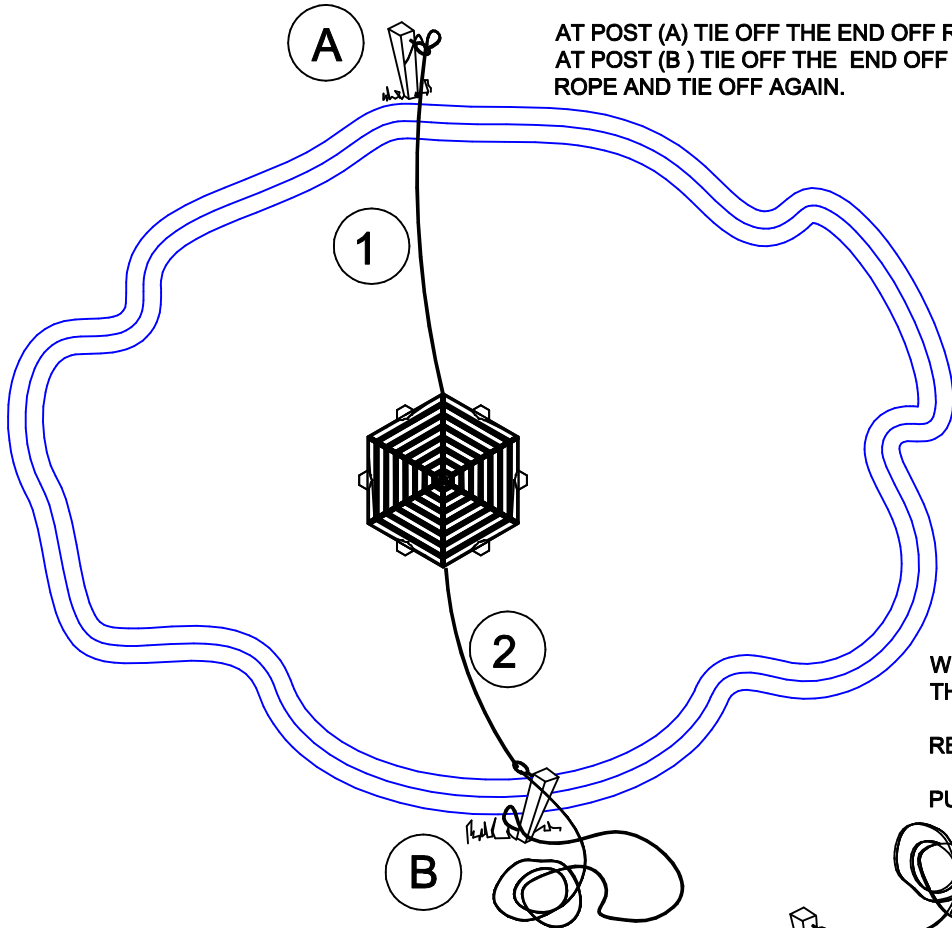

WHEN THE CANOPY IS REQUIRED BACK TO THE BANK FOR CLEANING & TREATING

RELEASE THE SLACK ROPE AT POST (B) .

PULL IN THE CANOPY AT POST (A)

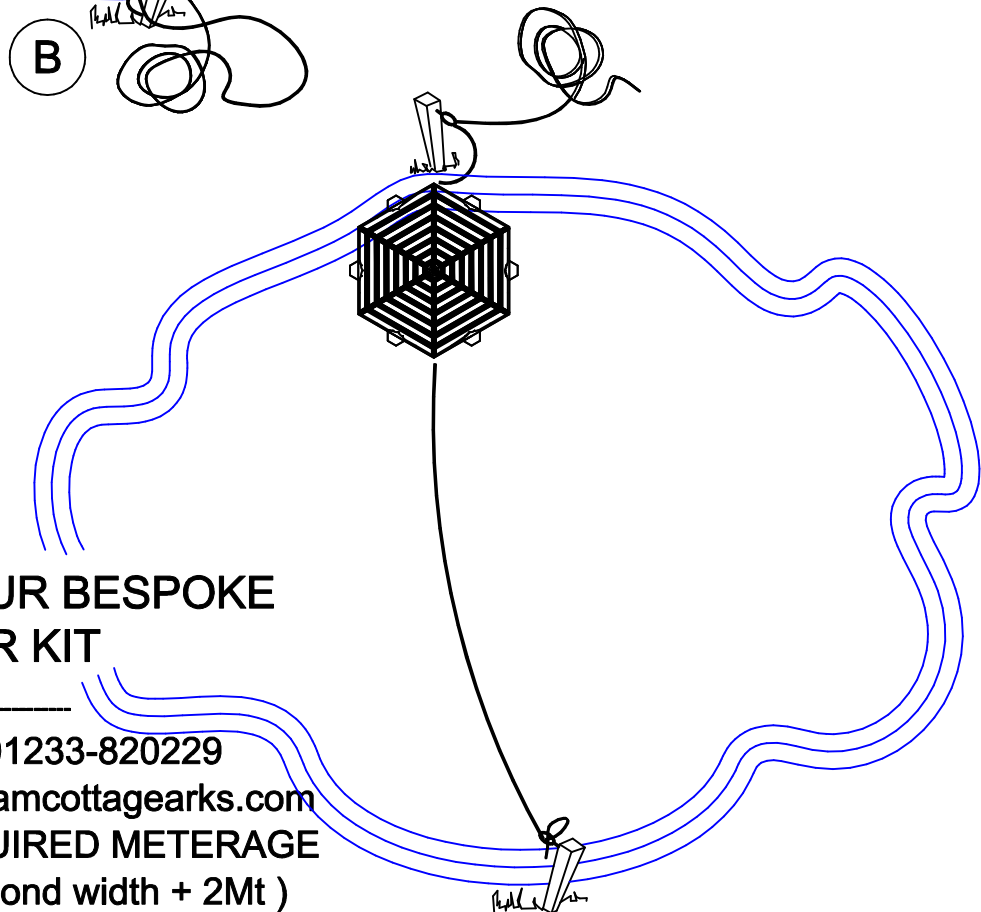

**TO OBTAIN YOUR BESPOKE
TETHER KIT**

PLEASE CALL 01233-820229

or E-MAIL rob@forshamcottagearks.com

TELL US YOUR REQUIRED METERAGE

OF ROPE ($1\frac{1}{2}$ x pond width + 2Mt)

SO WE CAN QUOTE YOU.